





# DATA SHEET

8/08/05

## 284-1X Series L-Band Splitters

The Model 284-1X RF Splitters are five or nine way, 950 - 2150 MHz, 0 dB gain splitters. The 284-1X splitters provide fused DC power insertion on the RF input connector center pin, surge protection, and excellent RF characteristics. Each splitter has a monitor connector on the front panel and four or eight outputs on the back panel. A SiDactor surge suppressor on the RF input protects against high voltage transients. On the front panel, green LEDs indicate the presence of DC voltage from the 115 VAC wall mount power supply and +18VDC power to the LNB (on J9 input center pin). Up to three 284s can be mounted on an 1 3/4" X 19" rack mount panel (**option -R1, -R2, or -R3**).

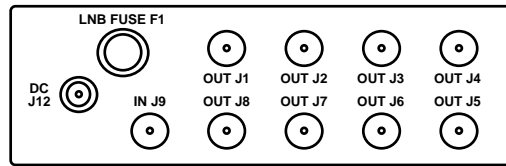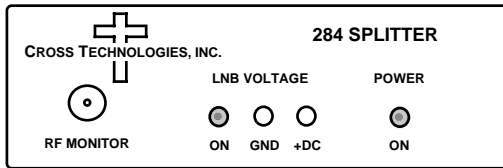

**284-19 Front and Rear Panels**

### EQUIPMENT SPECIFICATIONS\*

#### Input Characteristics

Input Impedance	75Ω
Return Loss	12dB min, 14dB typ
Input Level	-20 dBm total maximum

#### Output Characteristics

Impedance	75Ω
Return Loss	12dB min, 14dB typ

#### In-Band Characteristics

Gain	0 dB ± 1.0 dB
Frequency Response	± 1.0 dB, 950-2150 MHz; ± 0.5 dB, any 20 MHz increment
Port to Port Isolation	> 18dB, 20dB typ

#### Indicators

Power	Green LED indicates DC voltage prior to diode OR
LNB DC Voltage	Green LED indicates LNB power insertion on splitter input (J9)

#### Other


LNB DC voltage	18 ± 2 VDC
Output LNB current	300 ma, max
Surge Suppressor	SiDACTOR
RF connectors	Type F (female)
Power	115 VAC wall mount power supply
Size (Bench Top)	4.7" wide x 1.75" high X 6.5" deep

#### Options

-R1,-R2, or -R3	Rack mounting (mounted on a 19-inch standard (1RU) panel, 1.75" high x 7.0" deep)
-C	No wall mount power supply (use 2000-02 model power supply)
-P2	90-260 VAC wall mount power supply
-B	50Ω, BNC RF connectors

#### Models

284-15	One 5-way splitter
284-19	One 9-way splitter

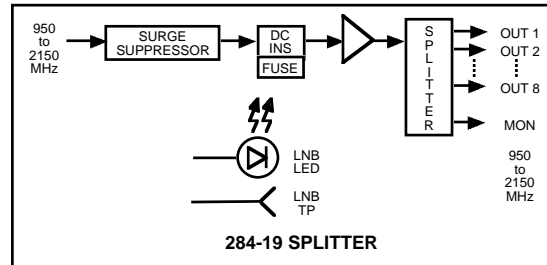

\*10°C to 40°C; Specifications subject to change without notice