


PRODELIN

INSAT C-Band Co-Pol/Cross Pol Feed With Internal High and Low Pass Filters

Specifications		Rx & Tx
Operating Frequency		
Receive (side port)		4.5 - 4.8 GHz
Transmit (through port)		6.725 - 7.025 GHz
Return Loss		
Receive (side port)		-18 dB
Transmit (through port)		-18 dB
Insertion Loss		
RX		.15 dB
TX		.15 dB
Flange Interface		
Rx		WR229
Tx		Type N Conn. or WR137
Isolation		
Co-Pol	Rx	60 dB
	Tx	65 dB
Cross-Pol	Rx	75 dB
	Tx	75 dB
Weight		1.8 lbs.

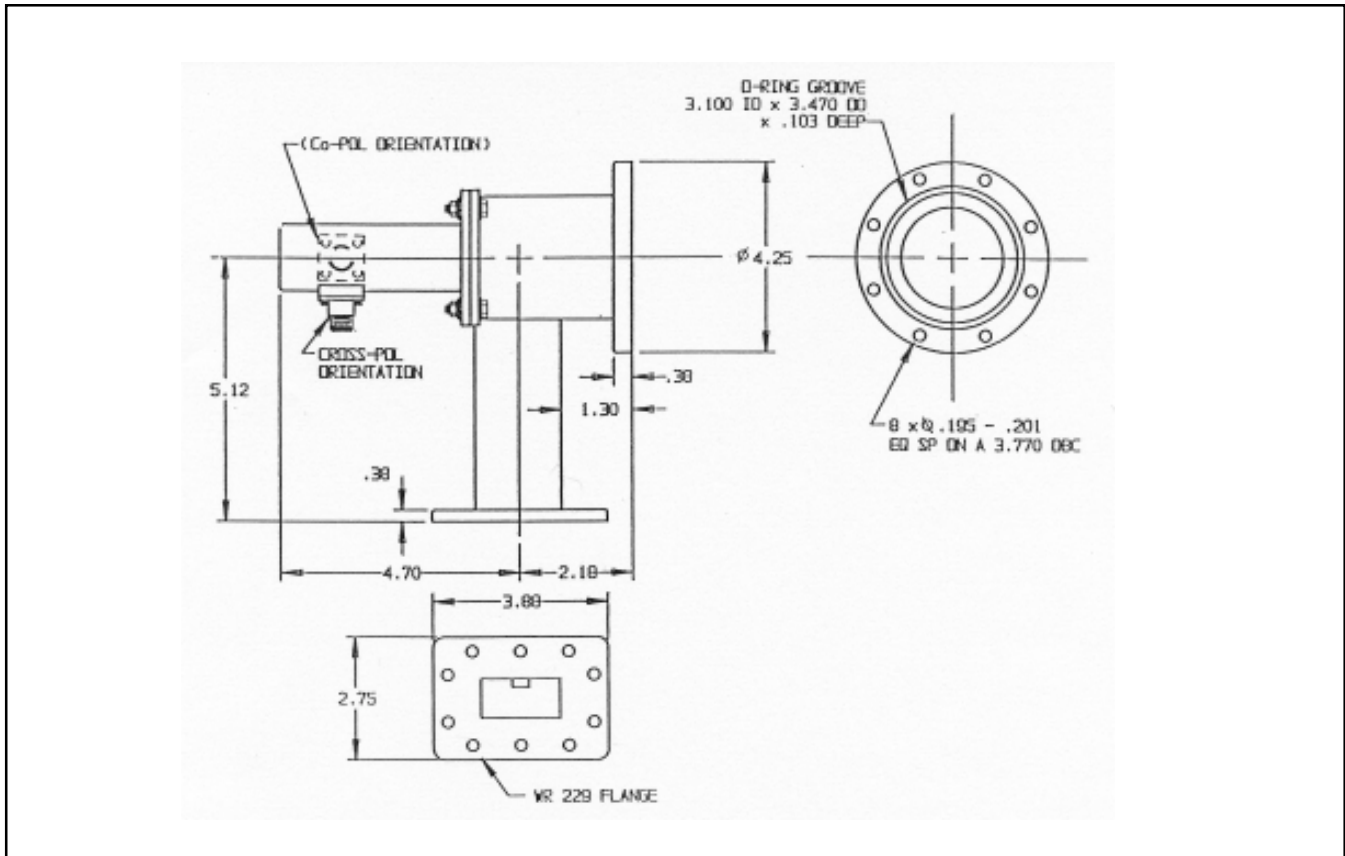

PO Box 368 Conover, NC 28613 USA
Tel: (828) 464-4141 Fax: (828) 466-0860
www.prodelin.com



PRODELIN
ISO 9002 registered
certificate no. A2421