

HOME COMPLETE

SKU: 470145

FEATURES

- Boosts all available networks speeds for enhanced cell signal coverage
- Offers an ideal solution for homeowners and residents
- Supports multiple cellular devices and users simultaneously
- Works with all US carriers; Verizon, AT&T, T-Mobile, UScellular, and more

ABOUT

The weBoost **Home Complete** is our best home booster for those who don't mind DIY installation. Everything needed for installation in a home is included. Once installed, this powerful booster improves cell signal on all US carrier networks, including Verizon, AT&T, T-Mobile, and more. Its contemporary design and 5G compatible coverage ensure it will work for the next decade and beyond. Like all weBoost solutions, it comes with an installation guide, a 2-year manufacturer's warranty, and a 30-day money-back guarantee.

COVERAGE AREA


IF THE OUTSIDE CELL SIGNAL IS:		YOUR BOOSTED CELL SIGNAL MAY COVER:
Strong	→	Max Coverage
Good	→	Multiple Rooms
Weak	→	Single Room
None	→	None

†⚠️**WARNING:** This product can expose you to chemicals including Nickel, which is known to the State of California to cause cancer, and Bisphenol A, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



- 5G COMPATIBLE
- MAX COVERAGE
- UP TO +72 dB GAIN
- MULTI-USER WIRELESS BOOSTER


KIT INCLUDES

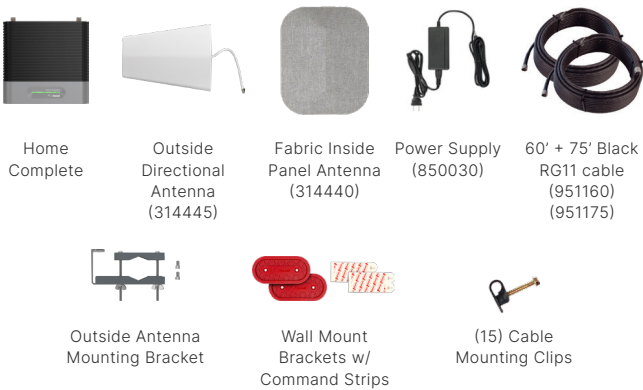

SPECIFICATIONS

SKU NUMBER	470145†	
FREQUENCIES	Band 12/17	700 MHz
	Band 13	700 MHz
	Band 5	850 MHz
	Band 4	1700/2100 MHz
	Band 25/2	1900 MHz
MAX GAIN	72 dB	
IMPEDANCE	75 Ohm	
POWER	110-240V AC, 50-60 Hz, 20 W	
CONNECTORS	F-Female	
BOOSTER DIMENSIONS	8.25 × 6 × 2.4 in	
BOOSTER WEIGHT	1.55 lbs	

HOW IT WORKS

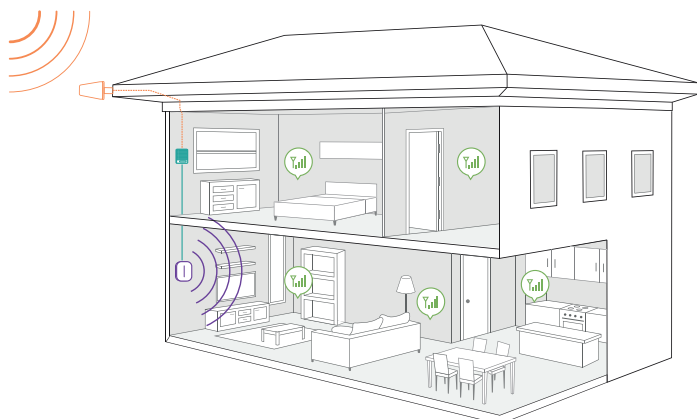

- 1 Receives signal:** The outside antenna reaches out to access the existing strong outdoor cell signal and delivers it inside to the booster.
- 2 Boost signal:** The booster receives the signal, amplifies it, and serves as a relay between your phone and the nearest cell tower.
- 3 Broadcasts signal:** Your devices get a stronger signal, and calls and data are fed through the booster back to the network.

AVAILABLE ACCESSORIES



Inside Panel Antenna
with mount
(314444)



Outside Directional
Antenna with mount
(314445)



75' RG-11 Extension
Cable with F Male
Connectors
(951175)




Splitters 75
Ohm (850034,
850035, 850036)




Lightning Surge
Protector 75 Ohm
(859992)

PACKAGE DIMENSIONS


17.75 L x 12.25 W x 12.25 H



FRONT



SIDE



TOP/BOTTOM



WEIGHT

MASTER CARTON: 25 L x 20 W x 15 H | 36.60 Lbs. | Qty 2


FOR PARTNER'S USE

Servsat Communications, Inc.
Atlanta, GA ,USA

SUPPORT



2-Year Warranty from Purchase.



UPC

