

200 Watt C-Band Outdoor High Power SSPA



FEATURES

- No Shelter Required
- Short Waveguide Run
- Low Cost Installation
- Removable Power Supply
- Complete Digital M&C Reference
- RS-232/422/485 Interface
- Built-in Redundancy Control

The **XTS-200C** high power solid state power amplifiers are compact, fully integrated antenna-mount units designed for low cost operation and longevity. Intended for outdoor operation, the **XTS-200C** eliminates the need for a separate amplifier shelter. In addition, the distance between the amplifier and the antenna feed can be shorter, thus eliminating long waveguide runs and associated RF losses.

RF Filters, cooling, and monitor and control (M&C) systems are all self-contained within the package. A high frequency resonant conversion power supply is used that accepts a wide range of prime power (90 to 264 VAC). A remote external controller is available to operate the SSPA from a user-selected location.

Depending upon user requirements, these high power amplifiers can be configured for single thread, redundant, or phase combined configurations. Mounting brackets are supplied to mount the high power amplifier to most popular antennas.




Field Replaceable Power Supply




PERFORMANCE SPECIFICATION

Parameters	XTS-200C	XTS-200C1
FREQUENCY RANGE, (extended frequency coverage available)	5.85 to 6.425 GHz	5.85 to 6.65 GHz
OUTPUT POWER		
Saturated Power (typical)		53 dBm
Rated Power (P1dB) @ Amplifier Flange		52 dBm
GAIN		
Small Signal (minimum)	65 dB, gain control set for maximum gain	
Small Signal (maximum)	75 dB, gain control set for maximum gain	
Gain Flatness (maximum)	2.5 dB	
Maximum SSG Variation	0.8 dB per 40 MHz	
Slope (maximum)	± 0.04 dB/MHz	
Stability, 24 hr. (maximum)	± 0.25 dB	
Stability, Temperature (maximum)	± 2.0 dB over temperature range at any frequency	
GAIN CONTROL	20 dB	
INTERMODULATION (maximum) with two equal carriers	-25 dBc @ 3 dB total output power backoff from rated power	
HARMONIC OUTPUT (maximum)	-60 dBc	
AM/PM Conversion (maximum)	2.5 deg/dB @ 3 dB below rated power	
NOISE POWER (maximum)		
Transmit Band	-80 dBW/4 kHz	
Receive Band	-150 dBW/4 kHz 3.7 to 4.2 GHz	
GROUP DELAY (maximum)		
Bandwidth	Any 40 MHz	
Linear	± 0.03 nS/MHz	
Parabolic	± 0.003 nS/MHz ²	
Ripple	1 nS/Pk-Pk	
RESIDUAL AM NOISE (maximum)	-50 dBc to 10 kHz -20 (1.5 + logf) dBc 10 to 500 kHz -85 dBc above 500 kHz	
PHASE NOISE (maximum)	10 dB below IESS phase noise profile	
VSWR		
Input (maximum)	1.2:1	
Output (maximum)	1.3:1	


BLOCK DIAGRAM

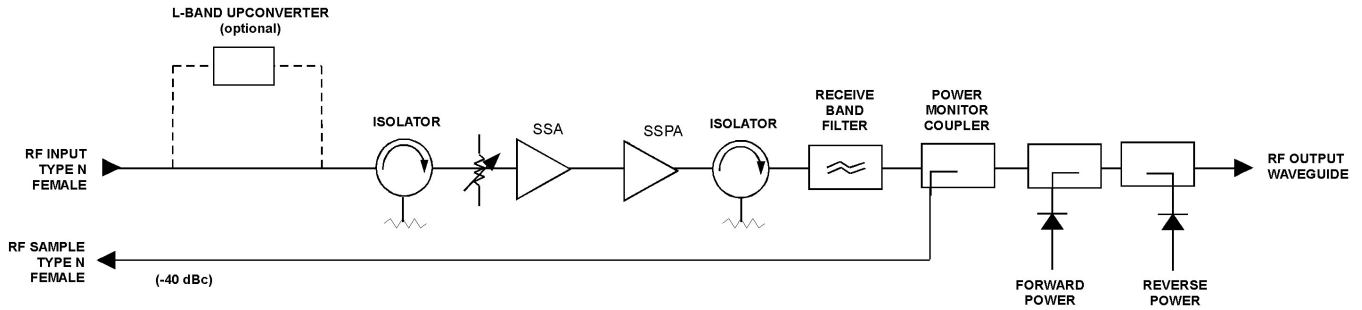

OUTLINE DRAWING

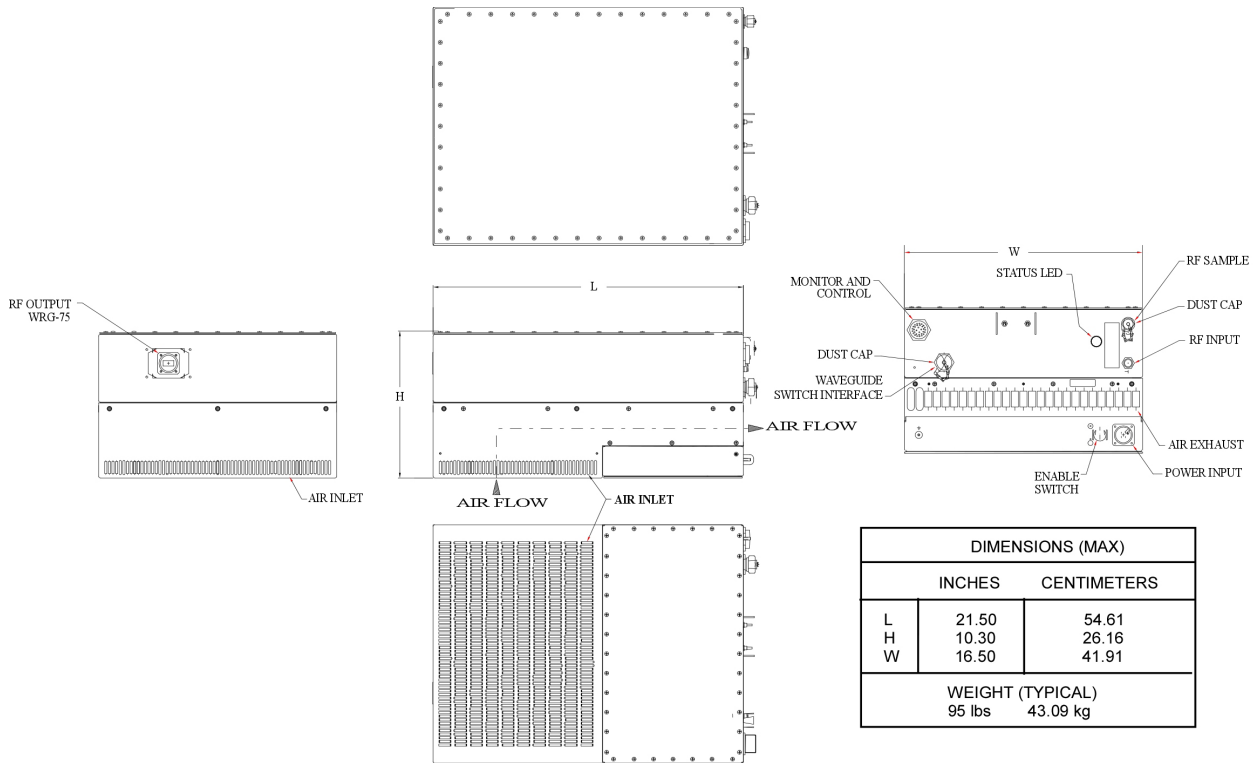

TYPICAL APPLICATIONS

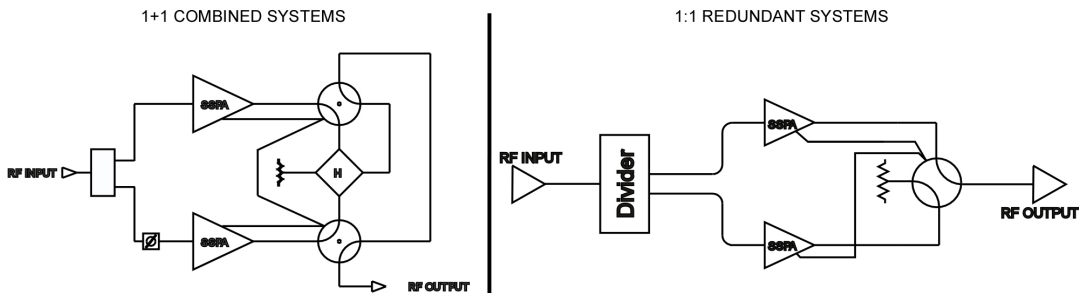

PRIME POWER

90 to 264 VAC
47 to 63 Hz, Single Phase
1250 VA (maximum)
0.95 Minimum Prime Power Factor



ENVIRONMENT

NONOPERATING TEMPERATURE RANGE	-50°C to +70°C
OPERATING TEMPERATURE RANGE	-40°C to +50°C (2°C/1000 Feet Derating)
HUMIDITY	Up to 100% Condensing
ALTITUDE	12,000 Feet MSL (maximum)
SHOCK AND VIBRATION	Normal Transportation
COOLING	Forced Air

INTERFACE

Type	Function	
LOCAL CONTROL	Prime Power ON/OFF	Local/Remote
	Power Supply ON/OFF	Transmit ON/OFF
LOCAL STATUS	Tri-Color LED:	
	Fault: Red	Standby: Continuous Amber
	Transmit ON: Green	
REMOTE CONTROL	Transmit ON/OFF	RF Inhibit (HV OFF)
	RF Attenuation	Fault Reset
	Summary Fault	Constant Power
REMOTE STATUS	Transmit ON	Transmit/Standby Hours
	RF Output Power	Fault Identification
	Reflected Power	Temperature
FORM C DRY CONTACT CLOSURE	Summary Fault	
COMPUTER SERIAL PORT	Hardware Interface: 2 Ports: RS-232 & RS-422/485	Xicom Command Set: ASCII Commands
RF MONITOR PORT	-40 dB Coupling Value (Nominal)	

OPTIONS

- Extended Frequency
 - 5.85 to 6.65 GHz (Option C1)
 - 5.85 to 6.725 GHz (Option C2)
- Redundancy Control
 - 1:1 (Option 29)
 - 1:1 w/Load Switching (Option 30)
 - 1+1 Solft Fail (Option 31)
- Built-in L-Band Block Upconverter (Option B1)
 - Frequencies Available: 5.85 to 6.425 GHz
 - 5.85 to 6.65 GHz

www.servsat.com

770-754-4547

sales@servsat.com