



XTRS-400C C-Band Rack Mount Solid State Power Amplifiers



- **400 Watt**
- **Built-in Redundancy Control**
 - 1:1**
 - 1:1 with load switching**
 - 1+1 Soft Fail**

The XTRS-400C is a highly efficient rack-mountable solid state power amplifier (SSPA) designed for fixed and mobile uplink applications.

RF filters, isolators, cooling, and monitor and control (M&C) systems are all self-contained within the package.

Rack space is conserved because the amplifiers occupy only 7 rack units (12.25 inches) of a standard 19 inch rack cabinet. Nominal weight is 135 pounds.

The unit features a menu driven front panel display, RS-232/422/485 serial port and Ethernet interfaces for complete computer control. Forward power, reverse power and temperature, and default parameters are easily monitored on the four line front panel display.


Gain control is provided via the front panel or through the remote interfaces.

A high frequency resonant conversion power supply is used that accepts a wide range of prime power (90 to 264 VAC). Power factor correction circuitry is


- **Complete Digital M&C Interface**
 - Ethernet**
 - RS-232**
 - RS-485**
- **Removable Power Supply**

also included which minimizes line current distortion and reduces the required Volt-Amps input.

Depending upon user requirements, this high power amplifier can be configured for single thread, redundant, or phase combined configurations.



1+1 Soft Fail



Redundant 1:1
with Load Switching

Front Panel Redundancy Options

PERFORMANCE SPECIFICATIONS

Parameter	XTRS-400C	
FREQUENCY RANGE standard extended frequency coverage available	5.85 - 6.425 GHz	5.85 - 6.65 GHz (Option C1)
OUTPUT POWER		
Saturated Power (Typical)	56 dBm	56 dBm
Rated Power(P1dB) @ Amplifier Flange	55 dBm	55 dBm
GAIN		
Small Signal, minimum	65 dB, gain control set for maximum gain	
Small Signal, maximum	75 dB, gain control set for maximum gain	
Gain Flatness, maximum	2.5 dB	
Maximum SSG Variation Over 40 MHz	0.8 dB per 40 MHz	
Slope, maximum	± 0.04 dB/MHz	
Stability, 24 Hr maximum	± 0.25 dB	
Stability, Temperature	± 2 dB maximum over temperature range at any frequency	
GAIN CONTROL	20 dB	
INTERMODULATION with two signals	- 25 dBc maximum with two equal carriers at 3 dB total power backoff from rate output	
HARMONIC OUTPUT, maximum	- 60 dBc	
AM/PM CONVERSION, maximum	2.5 deg/dB at 3 dB below rated output power	
NOISE POWER, maximum		
Transmit Band	- 80 dBW/4 kHz	
Receive Band	- 150 dBW/4 kHz 3.7 to 4.2 GHz	
GROUP DELAY, maximum		
Bandwidth	Any 40 MHz	
Linear	± 0.03 nS/MHz	
Parabolic	± 0.003 nS/MHz ²	
Ripple	1 nS/Pk-Pk	
RESIDUAL AM	- 50 dBc to 10 kHz - 20 (1.5 + logf) dBc 10 to 500 kHz - 85 dBc above 500 kHz	
PHASE NOISE, maximum	10 dB below IESS phase noise profile	
VSWR		
Input, maximum	1.2:1	
Output, maximum	1.3:1	

PRIME POWER

OPTIONS

Working Range 90 MIN. - 264 MAX., VAC
 47 to 63 Hz, single phase
 2800 VA Typical
 0.95 Minimum Prime Power Factor

- Extended Frequency
 - 5.85-6.65 GHz Option C1
 - 5.85-6.725 GHz Option C2
- Redundancy Control
 - 1:1 Option 29
 - 1:1 w/load Switching Option 30
 - 1+1 Soft Fail Option 31
- Built-in L-Band Block Upconverter Option B1
 Frequencies Available:
 - 5.85-6.425 GHz
 - 5.85-6.65 GHz



ENVIRONMENT

NONOPERATING TEMPERATURE RANGE	-50° C to +70° C
OPERATING TEMPERATURE RANGE	0° C to +50° C 2° C/1000 feet derating
HUMIDITY	Up to 95% Noncondensing
ALTITUDE	12,000 feet MSL maximum
SHOCK AND VIBRATION	Normal Transportation
COOLING	Forced Air (400 CFM Typical)


INTERFACE

	TYPE	FUNCTION			
CONTROLS	Local	Local/remote	AC Power ON/OFF		
	Local and Remote	Gain	Transmit ON/OFF	Fault Reset	
		Min/Max Power Alarm/Fault	Audio Alarm ON/OFF	Lamp Test	
		Reflected Power Alarm/Fault	Units (Watts, dBm, dBW)	Constant Power	
STATUS	Front Panel LEDs	Standby	Transmit		
		Local	Remote		
		Summary Fault			
	Front Panel Digital Display	Power Out	Attenuator Setting	Faults:	
		Reflected Power	Unit Selection	High VSWR	
		Temperature	Standby Hours	Temperature	
Transmit Hours		Power Supply			
	Dry Form-C Relay Contacts (Two)	Summary Fault			
COMPUTER	Hardware Interface	2 ports:	RS-232 & RS-422/RS-485		
		1 port:	Ethernet		
SERIAL PORT	Xicom Command Set	ASCII Commands			
RF SAMPLE PORT COUPLING	-40 dB Nominal				


XTRS-400C High Power Solid State Amplifiers



Block Diagram

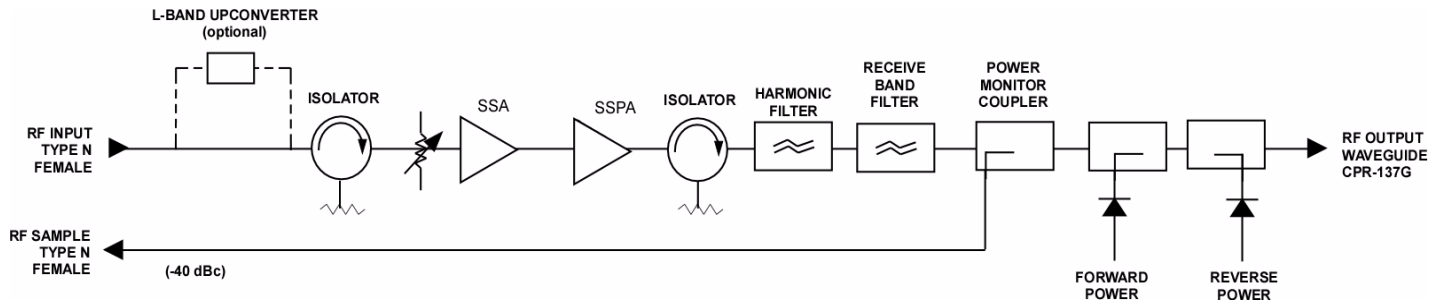


Outline Drawing

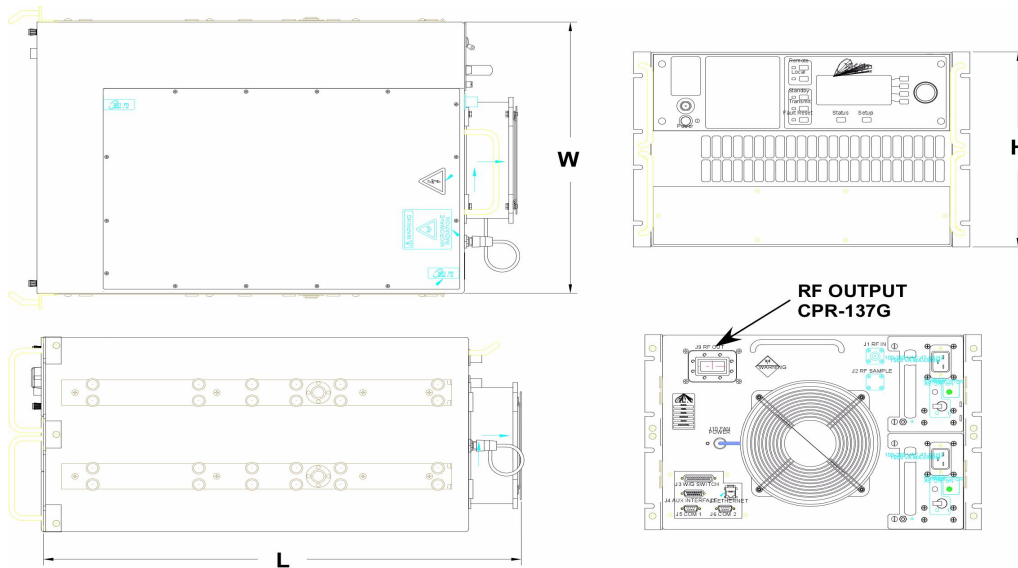


WEIGHT (TYPICAL)	
135 LBS	61.23 kg


	DIMENSIONS	
	INCHES	CENTIMETERS
L	26.98	68.529
W	17.00	43.18
H	12.22	31.038



Redundant 1:1



Redundant 1:1
with Load Switching



1+1 Soft Fail